


MODEL 210

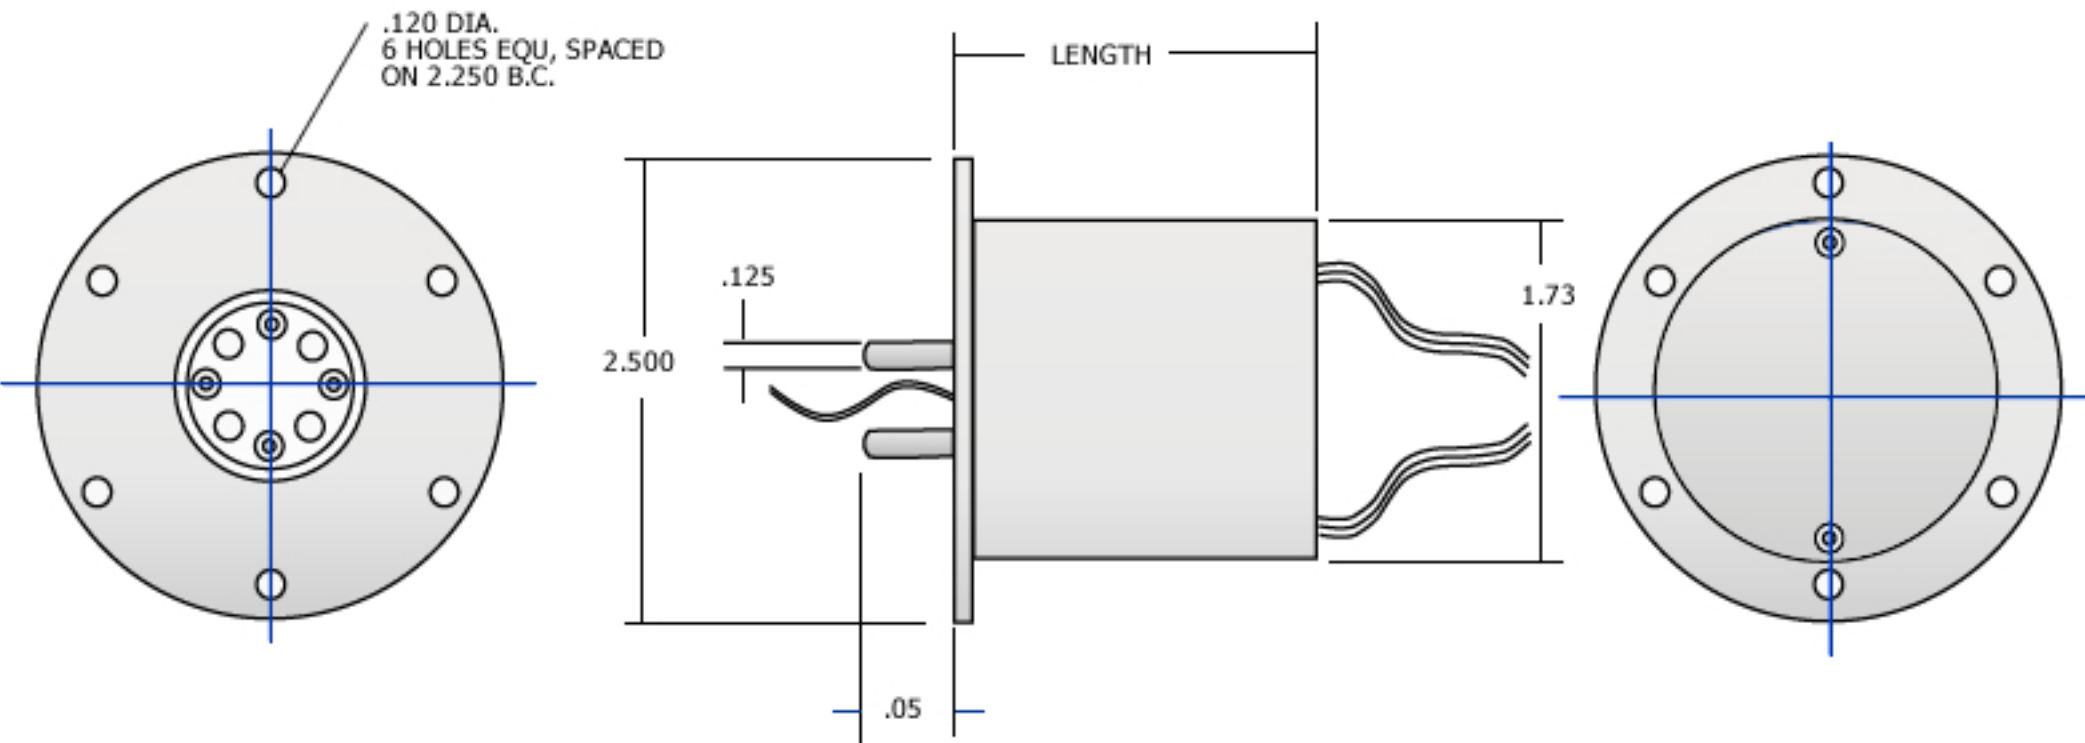

Connectors: Customers Choice

LENGTH

Number of Rings	Inches	Milimeters
2-6	1.33	33.78
8-12	1.99	50.54
14-18	2.65	67.31
20-24	3.31	84.07
26-30	3.97	100.83

MECHANICAL SPECS

Coin Silver Rings
Silver Graphite Contacts
Ball Bearings
Lead Length 3ft
Anodized Aluminum Housing

ELECTRICAL SPECS

Current - 5 Amps Continuous
Voltage - 300 V
Electrical Noise - <5mV
Wire: 22 AWG, 600 V
Wire Jacket: Teflon