


MODEL 117

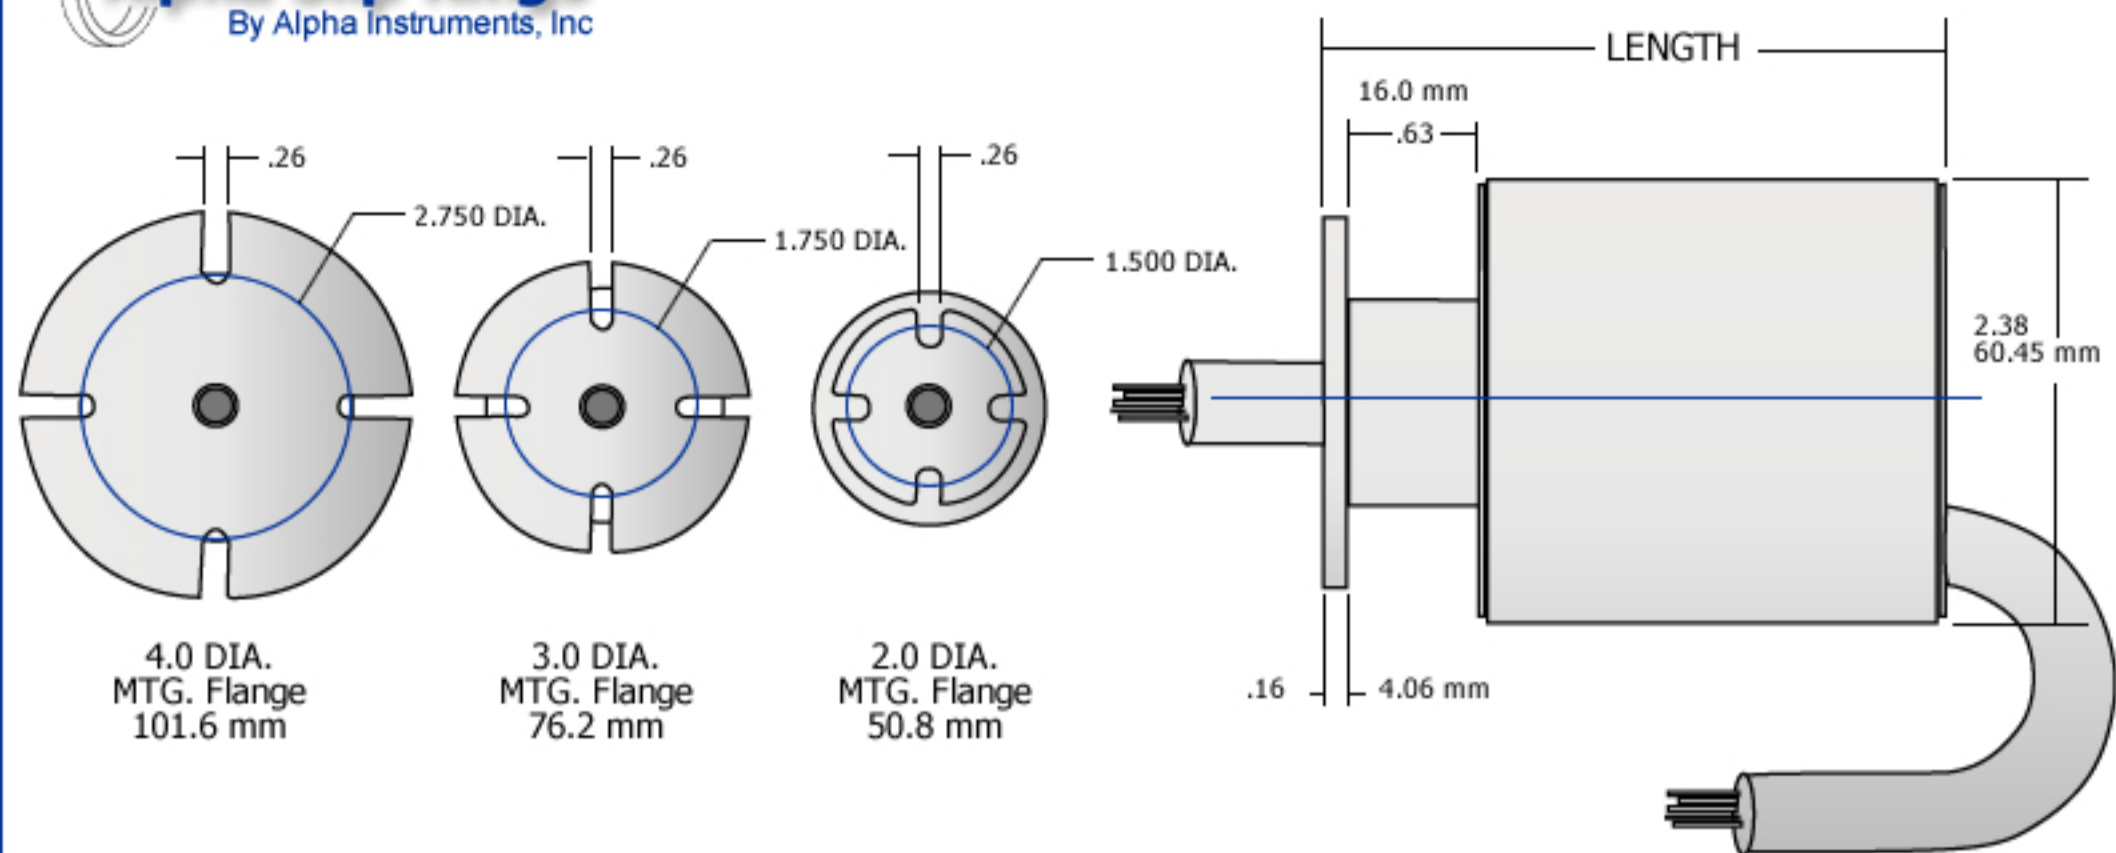

Connectors: Customers Choice

LENGTH

Number of Rings	Inches	Milimeters
02 - 04	2.60	66.04
06 - 08	3.20	81.28
10 - 12	3.80	96.52
14 - 16	4.40	111.76

MECHANICAL SPECS

Coin Silver Rings
 Silver Graphite Contacts
 Ball Bearings
 Passivated STN STL Housing
 Temperature -20 to 180 Deg F

ELECTRICAL SPECS

Current - 10 Amps Continuous
 Voltage - 1 KV
 Electrical Noise - 5 uV
 Wire: 18 AWG, IKV, 3 FT long
 Wire Jacket: Teflon

OPTIONAL CONFIGURATIONS

Longer Leads: COAX, T.S.P, QUAD
 Mounting Configuration Required
 Oil Filled
 Current: 24 AMPS
 Voltage: 2 KV
 Signals: DC to 275 MHZ
 Subsea Applications
 Temperature: -35 to 375°F
 Speed: 5,000 RPM
 Synthetic Fluid Immersion

Ordering Information

2 117 - 08 = 2117-08 (2" DIA Flange, 8 Rings)
 Flange Diameter Model Number of Rings Part Number