


ELECTRICAL SPECIFICATIONS
 14 RINGS RATED AT 3 AMPS 300V
 ELECTRICAL NOISE- < 5 uV

MECHANICAL SPECIFICATIONS
 COIN SILVER RINGS
 SILVER-GRAPHITE ELECTRICAL CONTACTS
 BALL BEARINGS
 CLEAR ANODIZED ALUMINUM ENCASMENT PARTS
 RPM < 200

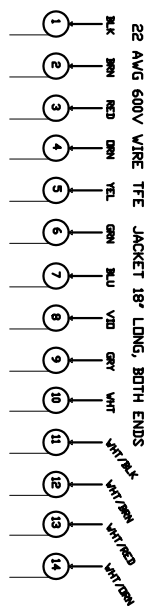

CONTENTS OF THIS DRAWING ARE PROPRIETARY AND CONFIDENTIAL. THEY ARE NOT TO BE REPLICATED OR DISCLOSED TO OTHER PARTIES WITHOUT WRITTEN AUTHORIZATION FROM ALPHA SLIP RINGS, INC.

PROJECT #	639	DATE	08/22/08
BY	DL	DESIGNED BY	DL
CHECKED BY	DL	DATE	08/22/08
SCALE	1:1	REVISED	1
ALPHA SLIP RINGS, INC 349-14 SLIP RING ASSEMBLY		DATE	08/22/08
349-14		REVISED	1
349-14		DATE	08/22/08
349-14		REVISED	1